



ZED is an easy to install, cost effective answer to projects requiring a double sided exit sign solution. Manufactured from hard wearing, resilient polycarbonate and ABS, the luminaire has the benefit of a removable geartray for easy installation and rapid future maintenance and a clip-on diffuser. The standard decorative skirt attachment lends a modern, sleek wedge profile appearance to the luminaire. A universal legend kit is supplied for application to an internally mounted legend plate, offering scratch and tamper resistance. Available in self-contained and slave operation formats, ZED can also be specified with EasiCheck automatic self-testing functionality.

- BSI kitemarked for peace of mind
- ICEL registered with verified light performance
- Competitively priced double sided exit sign
- Easy to install and maintain
- Internal, tamper resistant legend panels
- Supplied with universal legend kit for flexibility on site
- EasiCheck Intellem and CeaGuard self-test options
- Available in self-contained, AC/DC and AC mains slave versions
- Weatherproof IP54
- Supplied with lamp

Lamp Options

- 8W T5 fluorescent, 3500°K - G5 cap


Materials

- Body and skirt - flame retardant ABS, white finish
- Geartray - steel, powder coated in RAL9016 finish
- Diffuser - clear polycarbonate
- Legend mounting plate - flame retardant PVC
- Batteries (self-contained versions) - NiCd

Installation Notes

- Suitable for ceiling mounting
- BESA entry drill-outs on rear. Cable entries on ends
- Skirt fitted behind base, fixed when base secured
- Geartray and diffuser clip into position
- Universal legend kit supplied for application to mounting plate and clipped inside diffuser
- Supplied complete with 1 x 8W lamp

Dimensions

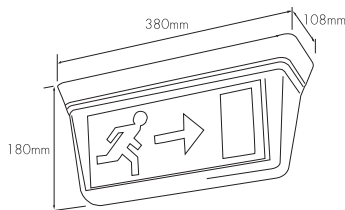

Options


- Maintained and non-maintained, 3 hour duration
- EasiCheck addressable testing. System detailed on page 304
- Central system slave versions
- CeaGuard testing versions

Specification

Self contained - To specify state: IP54 Double sided self contained emergency sign, with decorative skirt, clip-in geartray and diffuser with internal mounting plates for legend kits, as JSB ZED range, part no. _____

Slave - To specify state: IP54 Central system slave, double sided emergency sign, with decorative skirt, clip-in geartray and diffuser with internal mounting plates for legend kits, as JSB ZED range, part no. _____

Maximum Viewing Distance

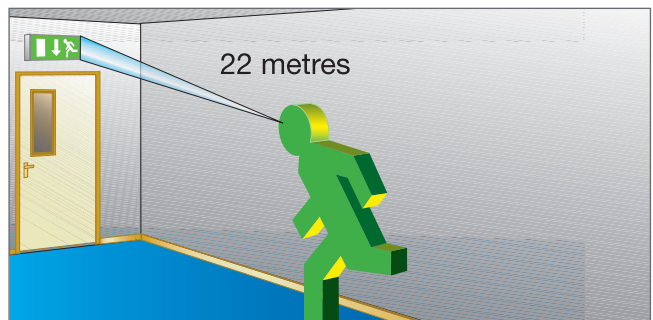

Catalogue Numbers

Lamp Rating	Cat No	Weight (kg)
Non Maintained 3Hr	ZED83	1.9
Non Maintained 3Hr Self-test	ZED83IS	1.9
Non Maintained 3Hr EasiCheck	ZED83EC	1.9
Non Maintained 3Hr EasiCheck 2	ZED83EC2	1.9
Maintained 3Hr	ZED83M	2.0
Maintained 3Hr Self-test	ZED83MIS	2.0
Maintained 3Hr EasiCheck	ZED83MEC	2.0
Maintained 3Hr EasiCheck 2	ZED83MEC2	2.0
230V Ceaguard Slave	ZE8230CG	1.1
230V AC Mains Slave	ZE8230	1.1
230V AC Mains Slave EasiCheck	ZE8230EC	1.1
50V AC/DC Central System Slave	ZE850	1.1
110V AC/DC Central System Slave	ZE8110	1.1